

COMPACT[®] 8/8W

Electric
scissor lifts

- 78.4 in (1.99 m) stowed height (Compact[®] 8).
- 32 in (0.81 m) width (Compact[®] 8).
- 770 lb (350 kg) platform capacity (Compact[®] 8).
- 5 in (13 cm) ground clearance.
- Security system with Pot Hole protection.
- Wider version Compact[®] 8W.



ARTICULATED BOOMS



VERTICAL MASTS



TELESCOPIG BOOMS



SCISSOR LIFTS



TRAILERS

Haulotte[®]

ON THE UP

COMPACT[®] 8/8W

The Haulotte[®] advantages

- 78.4 in (1.99 m) stowed height for easy travel through standard doorways
- 32 in (0.81 m) width allows operation in the most congested areas
- 83 in (2.1 m) outside turning radius ensure excellent manoeuvrability
- 5 in (13 cm) ground clearance allows for both inside and outside use
- Pot Hole protection ensures maximum safety
- Driveable at full height
- High operating autonomy
- Robust, reliable and easy to maintain design

STANDARD FEATURES




- Non marking tyres
- 3 ft (0.92 m) platform extension
- 2° tilt alarm (Compact 8)
- 3° tilt alarm (Compact 8W)
- 2 drive speeds
- 2 wheel drive and steer
- Free wheeling device
- 24 V - 4 x 6 V - 180 AH batteries
- 30 amp battery charger
- Battery charge indicator
- Hourmeter
- Towing hooks / lifting eyes
- Emergency lowering system

OPTIONS & ACCESSORIES

- Flashing light
- Motion alarm
- 220 V power to platform
- Collapsible handrails
(Compact 8W : 1.69 m / 5 ft 6 in)



ELECTRIC SCISSOR LIFTS

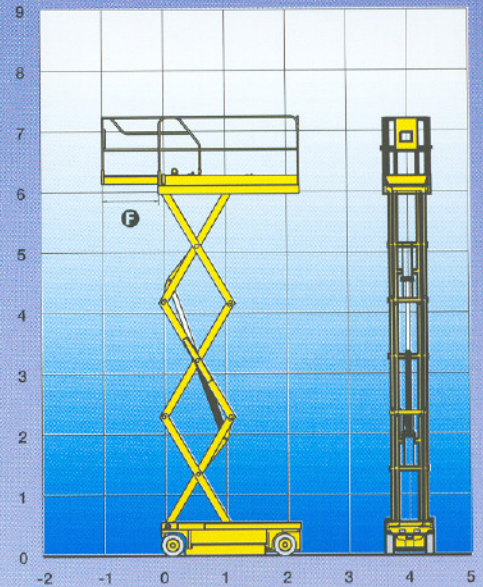

SPECIFICATIONS

	Compact [®] 8		Compact [®] 8 W	
Working height	26 ft 1 in	8.18 m	27 ft 1 in	8.27 m
Platform height	20 ft 3 in	6.18 m	20 ft 6 in	6.27 m
Platform capacity	770 lb	350 kg	990 lb	450 kg
A Stowed length	91 in	2.31 m	91 in	2.31 m
With access steps	95 in	2.42 m	95 in	2.42 m
B Width	32 in	0.81 m	47 in	1.20 m
C Stowed height (guardrails)	78.4 in	1.99 m	84 in	2.14 m
D Stowed height (platform)	35 in	0.87 m	40 in	1.02 m
E Wheelbase	6 ft 1 in	1.86 m	6 ft 1 in	1.86 m
Platform size	91 in x 32 in	2.3 m x 0.8 m	91 in x 47 in	2.3 m x 1.2 m
F Extension : Size	3 ft	0.92 m	3 ft	0.92 m
Extension : Capacity	330 lb	150 kg	330 lb	150 kg
Ground clearance	5 in	13 cm	5 in	13 cm
with deployed Pot Hole	1 in	2.5 cm	1 in	2.5 cm
Drive speed	0.6 mph - 2.2 mph - 1 km/h - 3.5 km/h			
Inside turning radius	0	0	8 in	0.2 m
Outside turning radius	83 in	2.1 m	99 in	2.5 m
Lift / lower (sec.)	30 / 29 sec.	30 / 29 sec.	30 / 29 sec.	30 / 29 sec.
Gradeability	25%	25%	23%	23%
Controls	proportional	proportional	proportional	Proportional
Batteries (amp/h)	180	180	250	250
Tyres (solid / non marking)	15 x 5 x 2in - 38 x 13 x 5 cm			
Hydraulic tank	7 gallons	25 l	7 gallons	25 l
Weight	3,637 lb	1,650 kg	4,300 lb	1,950 kg



Haulotte[®]